

**It's not PTZ pre-set tours, so is it Viseum controlled or an operator?
 Viseum uses advanced patented IMC technology so CRIMINALS BEWARE!!**



CCTV User Group & CCTV Image

The Superior Solution

Testament to Viseum being the world's leading brand in the new IMC market place is our Granted Patent. This hardware patent provides 20 years protection for one or more fixed cameras co-located with the moving PTZ camera installed on a common structure (pole or wall).

As Viseum provides the most effective, practical and cost efficient method for deploying and using IMC technology, any non-Viseum branded IMC system is either noticeably inferior or an illegal copy and in breach of International Law.



International

As Europe's patent examination procedure is the most stringent in the world, protection in USA and Canada is likely to commence in 2010.



Major UK Police Head Quarters

Technical

The key benefit of Viseum's patented IMC method is by constantly gathering and analysing the real time and historical activity of suspects from fixed cameras, it continually predicts accurately where, and how far, to automatically direct the PTZ cameras optical zoom, no matter how many suspects are being followed, which separate directions they go, or if they speed up, slow down, or change direction. Therefore it consistently capturing close-up court evidence of singular or multiple events.

Want to know more?

Contact us on +44 (0)1322 405724 or visit www.viseum.co.uk

Viseum IMCs have been granted 20 years patent protection

Any non-Viseum branded IMC system is either noticeably inferior or an illegal copy and in breach of International Law

European Patent 1579399, International Patent Pending: PCT/GB 03/04691, PCT/GB2006/001414 Canadian Patent Pending CA2505340





(11) **EP 1 579 399 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention of the grant of the patent:
25.07.2007 Bulletin 2007/30

(21) Application number: **03769685.3**

(22) Date of filing: **30.10.2003**

(51) Int Cl.:
G08B 13/194 (2006.01) G08B 15/00 (2006.01)

(86) International application number:
PCT/GB2003/004691

(87) International publication number:
WO 2004/042667 (21.05.2004 Gazette 2004/21)

(54) **SURVEILLANCE DEVICE**

ÜBERWACHUNGSEINRICHTUNG
DISPOSITIF DE SURVEILLANCE

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LI LU MC NL PT RO SE SI SK TR

(30) Priority: **07.11.2002 GB 0226002**

(43) Date of publication of application:
28.09.2005 Bulletin 2005/39

(73) Proprietor: **WQS Ltd.**
Douglas,
Isle of Man IM99 2TR (GB)

(72) Inventor: **THOMPSON, Stuart**
Erith
Kent DA8 3NN (GB)

(74) Representative: **Neobard, William John et al**
Kilburn & Strode
20 Red Lion Street
London WC1R 4PJ (GB)

(56) References cited:
US-A1- 2002 030 740 US-B1- 6 215 519

- **Paracamera data sheet S-360 2000**

EP 1 579 399 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The present invention relates to a surveillance device, a surveillance system and a method of watching over an area.

[0002] Surveillance devices using imaging techniques are well known in the art. One prior art security device contains a camera for collecting image data, and a control device responsive to the collected data to cause the camera to track a moving subject. Typically the control device operates to cause the image collection device to pan and/or tilt so as to follow a subject falling within the field of view of the pick-up device. The control device includes a servo motor and a processing circuit that detects movement within an image and which provides control signals to the motor to turn the image pick-up device to follow the movement.

[0003] The known device uses circuitry which requires calibration and which is responsive to ageing and environmental effects. It is thus necessary to recalibrate the circuitry on a regular basis if the correct information is to be picked up. Another problem with the known device is that it is vulnerable to distraction. Since the device is primarily response to data within the current field of view, one subject can enter the field of view and retain the attention of the device by suitable movements while the activities of a second subject out of the field of view remain undetected.

[0004] Document US 6 215 519 discloses a surveillance device having a first and second image collection device, the second device being controlled by the first device. The devices being mounted on a common support.

[0005] It would be advantageous to provide a device embodiments of which would be capable of avoiding the above-mentioned difficulties.

[0006] The invention is defined in the appended claims.

[0007] An advantage of a device according to the invention is that it can be embodied as a "one size suits all" structure in which only those sockets needed for the area being scrutinised are in fact occupied by fixed reference cameras. The structure can be such that cameras can simply be manually plugged in to the electrical connections and the structure then supports the cameras. The electrical communication network may be self configuring with a "plug and play" type of set-up to cope with different numbers and locations of cameras.

[0008] Exemplary embodiments of the invention will now be described with reference to the accompanying drawings in which:

Figure 1 shows a schematic perspective view of a surveillance device embodying the invention;

Figure 2 shows a view similar to that of Figure 1 with cameras removed;

Figure 3 shows a block schematic representation of a surveillance system embodying the present inven-

tion, and

Figure 4 shows another exemplary physical layout of a surveillance device embodying the invention.

5 **[0009]** Referring to Figure 1 a surveillance device 1 has a support 2 which is constructed and arranged to be secured to a structure, for example to a support pole or to a bracket secured to a building. The support of this embodiment includes three spaced generally circular plates 2a, 2b, 2c. A first image collection device 3 here consists of a discrete digital camera devices 4-11 (8-11 not visible in the drawing) disposed circumferentially about the support 2 with each digital camera device providing a 48 degree field of view. The first image collection device is disposed between the first and second plates 2a, 2b. The presently described embodiment provides 360 degree vision, the field of vision of the cameras providing a small degree of mutual overlap. In other embodiments, fewer cameras will be provided. For example if the surveillance device is secured to a building, it may be necessary to provide only 180 degrees of vision, in which case only four cameras need be provided, or 90 degrees in which case only two cameras are needed.

10 **[0010]** The surveillance device 1 further includes a second image collection device 20 here disposed under the first image collection device 3, and between the second and third plates 2b, 2c. The second image collection device 20 is likewise a digital camera having a 48 degree field of view, the camera 20 being capable of pan, tilt and zoom action. The tilt and zoom functions may be provided digitally for example by known image processing techniques, or may be by physical movements of components within the camera or of the camera 30 itself. The pan function is provided by a servo motor (75, see Figure 2) which drives the camera 20 around the support as shown by arrows A and B in Figure 1. As the present embodiment relates to a surveillance device capable of 360 degree surveillance, the camera 20 is capable of 360 degree rotation about the support 2. Where less than 360 degree vision is required, the camera 20 may be limited in movement, either physically or by virtue of a control program.

15 **[0011]** Although the present embodiment only shows a single camera 20, it would be possible to provide further cameras similar to the camera 20 and each capable of mutually independent pan, tilt and zoom where a high traffic is expected. The servo motor 75 is selected together with the weight of the camera 20 to allow rapid panning of the camera so as to allow the camera to switch between different detected events.

20 **[0012]** A support 2 embodying the invention is shown in Figure 2, with the cameras removed. The first, second and third circular plates 2a, 2b, 2c are spaced apart along a central column 100 along the axes of the plates. A cylindrical wall 101 is disposed between the first and second plates 2a, 2b. The wall 101 defines eight identical sockets 102-109 (four only visible) disposed regularly around its periphery. The sockets 102-109 afford housings for cameras 4-11, which can be mounted to the support by in-

sertion into the sockets. The support contains electrical circuitry with connectors in each socket to allow communication and control, as will later be described with respect to Figure 3. In the present embodiment, the support as delivered includes removable blanking plates covering each socket. The blanking plates are removed and cameras in the number needed for the application are inserted into the selected sockets.

[0013] Continuing to refer to Figure 2, a second cylindrical wall 100, extends downwardly from the second plate 2b and a third cylindrical wall 111 extends from the third plate 2c, the cylindrical walls 110, 111 leaving between them a slot 112 of constant width. A camera mount 120 extends through the slot 112, and is driven in rotation about the column 100 by means of the servo motor 75 (not visible). The camera mount 120 includes an electrical connector for a camera and, similarly to the sockets 102-109 acts to support a manually-inserted camera. As noted above, the device 2 can be extended by addition of further movable cameras by adding a further circular plate with slot-providing cylindrical walls.

[0014] In the described embodiment, a dome covers the support and provides weather-proofing in use. Where no dome is provided, the removable covers may provide weather-proofing and the slot 112 may have a gasket arrangement.

[0015] In Figure 3 an embodiment having only a first image collection device with only two digital cameras 4, 5 and a single camera 20 forming the second image collection device is shown. Each of the cameras 4, 5 consists of a respective lens 40, 50, a respective image pick-up device 41, 51, for example a CCD pick-up, and respective embedded processing circuitry 42, 52. The embedded processing circuitry 42, 52 includes on-chip memory storing instructions necessary for operation of the processing circuitry. Each of the digital cameras 4, 5 has additionally embedded processing circuitry 42, 52 connected via a LAN connection 80 which enables the image collection devices to output collected data. The LAN 80 extends to an intelligent hub device 70 which receives information from each of the image pick-up devices 4, 5.

[0016] In the present embodiment, each device on the LAN has its own time slot and communication is thus cyclic. Other techniques can be substituted for this - for example, there may be a priority allotted to some devices, or a token ring communication protocol can be used. The way the LAN communicates may be chosen according to the system architecture - for example in embodiments where the intelligence is well-distributed regular communication may be less essential than in embodiments where centralised control is provided.

[0017] The camera 20, similarly to the cameras 4, 5 also includes a lens 60, an image pick-up 61 and embedded processing circuitry 62. The camera 20 is controlled in rotation about the support 2 by the servo motor 75, which is connected to, and controlled from, an output port 71 of the hub device 70 via a bus connection 72. The camera 20 also receives signals from a control bus

73, 74, here shown as two separate buses for clarity so as to effect the zoom and tilt of the camera 20. In this embodiment, the bus 73 controls a digital zoom feature of the camera and the bus 74 controls a digital tilt feature. However, it would alternatively be possible to provide a moving zoom lens and a second servo motor to physically tilt the camera 20 if preferred. The buses 73 and 74 connect to a further port 76 of the hub 70.

[0018] The hub further has a data input/output interface port 76, which connects here via an Ethernet link 90 to a remote computer 200. The remote computer 200 includes a processor 201 running a program shown symbolically as block 202 and is connected to a store device such as hard disk 203 to store information on the hard disk, the information being derived from that provided over the Ethernet link 90.

[0019] In other embodiments, the Ethernet link 90 is replaced or supplemented by a wireless data link, or by another wired bus system, for example a USB. In these cases an interface device will be required between the surveillance device 1 and the communication channel and the communication channel and the computer 200.

[0020] In operation, the cameras 4, 5 monitor a 90 degree angle. The hub 70 operates the LAN 80 on a clocked basis and cyclically connects between the pick-up devices 4, 5. The embedded processing circuitry 42, 52 in the described embodiment includes firmware as previously discussed, for image analysis so that data output to the LAN 80 consist only of significant information. That is to say, the imaging output over the LAN 80 is compressed image data rather than raw data, for example such that the data represents only motion data. The processing circuitry 42, 52 converts the data into the correct form for the LAN, eg to IP data. The firmware may also carry out supervisory and control functions, for example adjusting operation for varying light conditions.

[0021] In other embodiments the processing circuitry 42, 52 does not run such firmware and merely acts to convert the data received from the CCD devices 41, 51 into the correct protocol for the LAN 80.

[0022] Again in the present embodiment, the intelligent hub 70 acts a server to the LAN with the cameras 4, 5, 20 acting as clients. The hub is programmed to respond to data on the LAN 80 indicative of movement in the area under observation and in response thereto controls the servo motor 105 and the tilt and zoom buses 73, 74 to cause the camera 20 to home in on the movement. In this embodiment the hub 70 is programmed to assess the size of the moving subject by assessing the size of the moving subject in terms of pixels and the amount of zoom currently applied. The device may be programmed to ignore subjects of less than a threshold size, so as to disregard moving leaves, birds and the like.

[0023] However, in other embodiments, all moving subjects may be tracked by the camera 20.

[0024] The hub 70, in any event, converts the incoming data from the LAN 80 to the relevant format for the communication link 90, so that all movement data is provided

to the compute 200. In the computer 200, the data are provided to the processor 201 and processed by the software 202. The data are then stored on the hard drive 203. The hard drive is written to in a recirculating form so that once the hard drive reaches a given state of fullness, rewriting starts at the earliest entry.

[0025] Although the present embodiment has been described as having substantial intelligence built into the surveillance device 1, specifically the computer 200 could represent the intelligence in the system, and the processing devices in the image pick-up devices, the camera and the hub could merely reformat data.

[0026] It is fundamental to the preferred embodiments that no human control or supervision is needed to direct the operation of the device, at least once set up. The software of the system is, in these preferred embodiments, capable of assessing the activity in a scene being monitored and to direct the relevant image pick-up device (s) to zoom, pan and tilt appropriately to input visual data likely to be of interest. Such data may be archived, presented for viewing or, if so desired, cause an alarm to be sounded.

[0027] It would alternatively be possible to provide all of the intelligence in the camera itself and confine the functionality of the computer 200 to recording data.

[0028] Power may be provided for the device 1 from a mains power supply, by power over Ethernet, by the use of photovoltaic cells, wind turbines or otherwise as known.

[0029] The presence of the two fixed cameras 4, 5 in the embodiment (more cameras in embodiments where a wider range of observation is needed) means that the area being observed is constantly under observation. The device is programmed to cause the moving camera 20 to shuttle between multiple moving subjects if these are in different zones of the area, and to forward image data of the activities of each subject for recording. Where a relatively busy area is being observed, plural moving cameras are provided, and each camera may be allotted particular subjects using an algorithm to increase observation efficiency. Hence if two cameras are provided and five subjects are moving, the device may divide the subjects by location to minimise camera movement, or zoom/tilt changes.

[0030] Although the described embodiment uses cameras with all associated circuitry on-board, camera costs may be reduced by providing the embedded processing circuitry 42, 52 as part of the support device itself, along with the LAN and hub. In other embodiments, the circuitry of the support includes only the LAN wiring, the intelligent hub, and sockets for cameras having their own on-board processing.

[0031] In an embodiment, the cameras are analogue PAL cameras. In another embodiment digital cameras are used. Where megapixel digital technology is employed electronic pan, tilt and zoom can be used within each reference camera as well as the mechanical pan, tilt and zoom (where available) to cover more simultane-

ous occurrences or events. This allows the mechanical pan, tilt and zoom to have a greater life expectancy.

[0032] The zoom level of the pan, tilt and zoom camera may be used in calculating the size of the moving object from the reference camera with a pre-determined desired zoom setting, this zoom level being termed "zoom factor" In some embodiments, the images captured from the moving camera are not used in controlling the pan, tilt or zoom mechanism, this control being exclusively from the reference cameras. In other embodiments, image data from the moving camera is used to determine pan, tilt and zoom instructions, for example for object tracking purposes

[0033] When in an external environment the quality of a picture varies immensely due to noise. This may result in the image processing system momentarily losing its subject (say losing one or two frames). Coupled with this noise problem, shadows of a moving object also add to the processing burden where an object is moving. Thus the time that the system momentarily loses its subject may be the same time that the subject gains a shadow - this shadow could then momentarily become the only moving object in the scene and hence the only information available to predict where the object is moving towards.

[0034] The problems may be solved by using an algorithm, e.g. a least squares fit algorithm, to balance the centre of mass taking all the above into consideration so the camera smoothly follows the heaviest dense mass without darting off on each frame's prediction point. The algorithm may use a number of historical frames as well as a least squares fit algorithm to smooth the operation.

[0035] Figure 4 shows another embodiment of the surveillance device, having a support (100), a set of reference cameras (105) and a dome covering a moving camera (110).

[0036] An embodiment of the present invention has been described with particular reference to the example illustrated. However, it will be appreciated that variations and modification may be made to the example described within the scope of the present invention.

Claims

1. A surveillance device having at least one first image collection device, at least one second image collection device, the or each second image collection device having a respective servo motor, the second image collection device having an optical axis whereby the servo motor is arranged to regulate the direction of the optical axis of the second image collection device; wherein the second image collection device is controlled by processor means to observe the location where movement is detected by a first image collection device:

characterised in that the surveillance device comprises:

a support constructed and arranged to be secured to a structure, wherein the support defines plural mounting sockets for the at least one first image collection device, the sockets being disposed regularly and circumferentially about an axis of the support, the or each first image collection device being thereby fixedly secured to the support,

wherein the or each second image collection device is rotatable about the support axis by the servo motor.

2. A surveillance device according to claim 1, wherein the processor means has respective ports connected to:

receive data representatives of images collected by the first and second image collection devices;
control the servo motor for control thereof; and
input data from or output data to an input/output interface.

3. A surveillance device according to claim 1 or 2, wherein the first image collection devices each include respective embedded processing circuitry having one or more of the functions of: selecting significant data; compressing it; and converting it to an appropriate format for transmission.

4. A surveillance device according to any preceding claim, wherein the processor means is operable to convert data from the first and second image collection devices using a communications protocol into a pulse stream for output to the input/output interface.

5. A surveillance device according to any preceding claim, wherein the second image collection device has a zoom input and a tilt input, and a field of view variable in dependence on a control signal at the zoom input and a control signal at the tilt input.

6. A surveillance device according to any preceding claim, having an intelligent hub device for communicating with said first and second image collection devices.

7. A surveillance device according to any preceding claim wherein the processor means runs a predictive control algorithm whereby previous locations of motion of an object of interest are used to determine where to aim a movable camera and an "auto-ignore" algorithm to account for movement of features such as trees and plants, so that a moving camera is not directed to examine areas of no interest.

8. A surveillance system comprising a surveillance de-

vice according to any preceding claim, in combination with a computer remote from the surveillance device, the system further comprising a communications device interconnecting the surveillance device and the remote computer, wherein the communications device comprises one or more of an Ethernet cable and a wireless communication system which comprises at least one of a radio channel and a wireless LAN.

9. A method of watching over an area using a surveillance device having a first spatially fixed image collection device and a second image collection device having a movable field of view, the device having an output for image data, the method comprising using the first image collection device to observe the area and automatically processing data from said first image collection device to detect movement; upon detection of movement, transferring signals from the first image collection device to the output, said signals representative of an image of at least a location where said movement takes place, and automatically controlling the field of view of the second image collection device to observe the location where said movement takes place; and, transferring signals from said second image collection device, said signals being representative of an image of said location where said movement takes place at least while said movement is detected

wherein the surveillance device comprises:

a support constructed and arranged to be secured to a structure, wherein the support defines plural mounting sockets for the at least one first image collection device, the sockets being disposed regularly and circumferentially about an axis of the support, the or each first image collection device being thereby fixedly secured to the support, wherein the or each second image collection device is rotatable about the support axis by the servo motor; and:

the method further comprises selecting sockets according to the application of the surveillance device and inserting cameras in the number needed for the application into the selected sockets.

Patentansprüche

1. Überwachungseinrichtung mit zumindest einer ersten Bildsammelvorrichtung, zumindest einer zweiten Bildsammelvorrichtung, wobei die oder jede zweite Bildsammelvorrichtung einen entsprechenden Servomotor hat, wobei die zweite Bildsammelvorrichtung eine optische Achse aufweist, wobei der Servomotor angeordnet ist, um

die Richtung der optischen Achse der zweiten Bildsammelvorrichtung zu regulieren; wobei die zweite Bildsammelvorrichtung von Prozessormitteln gesteuert wird, welche die Stelle beobachten, an der eine Bewegung von einer ersten Bildsammelvorrichtung detektiert wird:

dadurch gekennzeichnet, dass die Überwachungseinrichtung enthält:

eine Halterung, welche zur Befestigung an einer Struktur konstruiert und angeordnet ist, wobei die Halterung mehrere Befestigungsfassungen für die zumindest eine erste Bildsammelvorrichtung definiert, wobei die Fassungen regelmäßig und in Umfangsrichtung um eine Achse der Halterung herum angeordnet sind, wobei die oder jede erste Bildsammelvorrichtung dadurch fest an der Halterung befestigt ist,

wobei die oder jede zweite Bildsammelvorrichtung durch den Servomotor um die Achse der Halterung rotierbar ist.

2. Überwachungseinrichtung nach Anspruch 1, wobei das Prozessormittel entsprechende Anschlüsse hat, welche verbunden sind, um:

Datenrepräsentanten von Bildern zu empfangen, die von den ersten und zweiten Bildsammelvorrichtungen gesammelt wurden; den Servomotor zwecks dessen Steuerung zu steuern; und Daten von einer oder Daten an eine Eingabe-/Ausgabeschnittstelle ein- oder auszugeben.

3. Überwachungseinrichtung nach Anspruch 1 oder 2, wobei die ersten Bildsammelvorrichtungen jeweils eine entsprechende eingebettete Verarbeitungsschaltung beinhalten, welche eine oder mehrere Funktionen ausübt von: Selektieren signifikanter Daten; Komprimieren von diesen; und Konvertieren von diesen in ein geeignetes Format zur Übertragung.

4. Überwachungseinrichtung nach einem der vorhergehenden Ansprüche, wobei das Prozessormittel eingerichtet ist, Daten von den ersten und zweiten Bildsammelvorrichtungen unter Verwendung eines Kommunikationsprotokolls in einen Impulsstrom zur Ausgabe an die Eingabe-/Ausgabeschnittstelle umzuwandeln.

5. Überwachungseinrichtung nach einem der vorhergehenden Ansprüche, wobei die zweite Bildsammelvorrichtung einen Zoom-Eingang und einen Neigungs-Eingang und ein Sichtfeld aufweist, welches abhängig von einem Steuersignal an den Zoom-Eingang und einem Steuersignal an den Neigungs-Eingang variabel ist.

6. Überwachungseinrichtung nach einem der vorhergehenden Ansprüche, welches eine intelligente Narben-Verteilervorrichtung zur Kommunikation mit den ersten und zweiten Bildsammelvorrichtungen aufweist.

7. Überwachungseinrichtung nach einem der vorhergehenden Ansprüche, wobei das Prozessormittel einen Prediktions-Steuerungsalgorithmus ausführt, wobei vorherige Bewegungsstellen eines Zielobjekts verwendet werden, um zu bestimmen, wo eine bewegliche Kamera und ein "automatischer Ignorier"-Algorithmus auszurichten sind, um der Bewegung von Charakteristika wie Bäumen und Pflanzen Rechnung zu tragen, so dass eine bewegliche Kamera nicht auf die Untersuchung von nicht interessierenden Bereichen gerichtet ist.

8. Überwachungssystem umfassend eine Überwachungseinrichtung nach einem der vorhergehenden Ansprüche, in Kombination mit einem Rechner, welcher fern der Überwachungseinrichtung angeordnet ist, wobei das System weiters eine Kommunikationsvorrichtung umfasst, welche die Überwachungseinrichtung und den Fern-Rechner miteinander verbindet, wobei die Kommunikationsvorrichtung eines oder mehrere der Elemente Ethernet-Kabel und drahtloses Kommunikationssystem, umfassend zumindest eines von Funkkanal und drahtloses LAN, umfasst.

9. Verfahren zur Überwachung eines Bereichs unter Verwendung einer Überwachungseinrichtung mit zumindest einer räumlich fixierten Bildsammelvorrichtung und einer zweiten Bildsammelvorrichtung mit einem beweglichen Sichtfeld, wobei die Einrichtung einen Ausgang für Bilddaten aufweist, wobei das Verfahren die Verwendung einer ersten Bildsammelvorrichtung zum Beobachten des Bereichs und automatisches Verarbeiten der Daten von der ersten Bildsammelvorrichtung zur Bewegungsdetektierung; nach einer Bewegungsdetektierung das Übermitteln von Signalen aus der ersten Bildsammelvorrichtung zum Ausgang, wobei die Signale repräsentativ für ein Bild zumindest einer Stelle sind, an der die Bewegung stattfindet, und das automatische Steuern des Sichtfeldes der zweiten Bildsammelvorrichtung zur Beobachtung der Stelle, an der die Bewegung stattfindet; und das Übermitteln der Signale von der zweiten Bildsammelvorrichtung umfasst, wobei die Signale repräsentativ für ein Bild der Stelle sind, an der die Bewegung stattfindet, zumindest während die Bewegung detektiert wird, wobei die Überwachungseinrichtung enthält:

eine Halterung, welche zur Befestigung an einer Struktur konstruiert und angeordnet ist, wobei die Halterung mehrere Befestigungsfassungen

für die zumindest eine erste Bildsammelvorrichtung definiert, wobei die Fassungen regelmäßig und in Umfangsrichtung um eine Achse der Halterung herum angeordnet sind, wobei die oder jede erste Bildsammelvorrichtung dadurch fest an der Halterung befestigt wird, wobei die oder jede zweite Bildsammelvorrichtung durch den Servomotor um die Achse der Halterung rotierbar ist; und:

das Verfahren weiters das Selektieren von Buchsen gemäß der Anwendung der Überwachungseinrichtung und das Einsetzen von Kameras in der für die Anwendung notwendigen Anzahl in die selektierten Fassungen umfasst.

Revendications

1. Dispositif de surveillance comprenant au moins un premier dispositif de collecte d'images, au moins un deuxième dispositif de collecte d'images, le ou chaque deuxième dispositif de collecte d'images comprenant un servomoteur respectif, le deuxième dispositif de collecte d'images présentant un axe optique, le servomoteur étant conçu pour réguler la direction de l'axe optique du deuxième dispositif de collecte d'images, le deuxième dispositif de collecte d'images étant commandé par un moyen de processeur pour observer l'endroit où un mouvement est détecté par un premier dispositif de collecte d'images;

caractérisé en ce que le dispositif de surveillance comprend :

un support conçu et agencé pour être fixé à une structure, dans lequel le support définit plusieurs douilles de montage pour au moins un premier dispositif de collecte d'images, les douilles étant disposées de façon régulière et circonférentielle autour d'un axe du support, le ou chaque premier dispositif de collecte d'images étant ainsi fixé fixement au support,

dans lequel le ou chaque deuxième dispositif de collecte d'images peut être mis en rotation autour de l'axe de support par le servomoteur.

2. Dispositif de surveillance selon la revendication 1, dans lequel le moyen de processeur comprend des ports respectifs connectés pour :

recevoir des données représentatives d'images collectées par les premier et deuxième dispositifs de collecte d'images;
commander le servomoteur pour commander celui-ci; et

entrer des données ou sortir des données vers une interface d'entrée/sortie.

3. Dispositif de surveillance selon la revendication 1 ou 2, dans lequel les premiers dispositifs de collecte d'images comprennent chacun un circuit de traitement incorporé respectif comprenant une ou plusieurs fonctions parmi les fonctions suivantes :

sélectionner des données significatives; les comprimer et les convertir à un format approprié pour une transmission.

4. Dispositif de surveillance selon l'une quelconque des revendications précédentes, dans lequel le moyen de processeur peut être utilisé pour convertir des données en provenance des premier et deuxième dispositifs de collecte d'images en utilisant un protocole de communication en un train d'impulsions à sortir vers l'interface d'entrée/sortie.

5. Dispositif de surveillance selon l'une quelconque des revendications précédentes, dans lequel le deuxième dispositif de collecte d'images comprend une entrée de zoom et une entrée d'inclinaison, et un champ de vision variable dépendant d'un signal de commande à l'entrée de zoom et d'un signal de commande à l'entrée d'inclinaison.

6. Dispositif de surveillance selon l'une quelconque des revendications précédentes, comprenant un concentrateur intelligent pour communiquer avec lesdits premier et deuxième dispositifs de collecte d'images.

7. Dispositif de surveillance selon l'une quelconque des revendications précédentes, dans lequel le moyen de processeur exécute un algorithme de commande prédictif par lequel des endroits de mouvement précédents d'un objet intéressant sont utilisés pour déterminer l'endroit où diriger une caméra mobile, et un algorithme "d'ignorance automatique" pour tenir compte du mouvement de caractéristiques telles que des arbres et des plantes, de sorte qu'une caméra mobile n'est pas dirigée pour examiner des régions sans intérêt.

8. Système de surveillance comprenant un dispositif de surveillance selon l'une quelconque des revendications précédentes, en combinaison avec un ordinateur distant du dispositif de surveillance, le système comprenant en outre un dispositif de communication interconnectant le dispositif de surveillance et l'ordinateur distant, dans lequel le dispositif de communication comprend un ou plusieurs composant(s) parmi un câble Ethernet et un système de communication sans fil comprenant au moins un élément parmi un canal radio et un réseau local (LAN)

sans fil.

9. Procédé de surveillance d'une zone utilisant un dispositif de surveillance comprenant un premier dispositif de collecte d'images spatialement fixe et un deuxième dispositif de collecte d'images présentant un champ de vision mobile, le dispositif comprenant une sortie pour des données d'image, le procédé comprenant l'utilisation du premier dispositif de collecte d'images pour observer la zone et traiter automatiquement les données fournies par ledit premier dispositif de collecte d'images pour détecter un mouvement; lors de la détection d'un mouvement, le transfert de signaux du premier dispositif de collecte d'images à la sortie, lesdits signaux étant représentatifs d'une image d'au moins un endroit où ledit mouvement s'est produit, et la commande automatique du champ de vision du deuxième dispositif de collecte d'images pour observer l'endroit où ledit mouvement s'est produit; et le transfert de signaux à partir dudit deuxième dispositif de collecte d'images, lesdits signaux étant représentatifs d'une image dudit endroit auquel ledit mouvement se produit au moins pendant la détection dudit mouvement, dans lequel ledit dispositif de surveillance comprend :

un support conçu et agencé pour être fixé à une structure, dans lequel le support définit plusieurs douilles de montage pour au moins un premier dispositif de collecte d'images, les douilles étant disposées de façon régulière et circonférentielle autour d'un axe du support, le ou chaque premier dispositif de collecte d'images étant ainsi fixé fixement au support, dans lequel le ou chaque deuxième dispositif de collecte d'images peut être mis en rotation autour de l'axe de support par le servomoteur; et le procédé comprenant en outre la sélection de douilles selon l'application du dispositif de surveillance et l'insertion dans les douilles sélectionnées du nombre de caméras nécessaires pour l'application.

45

50

55

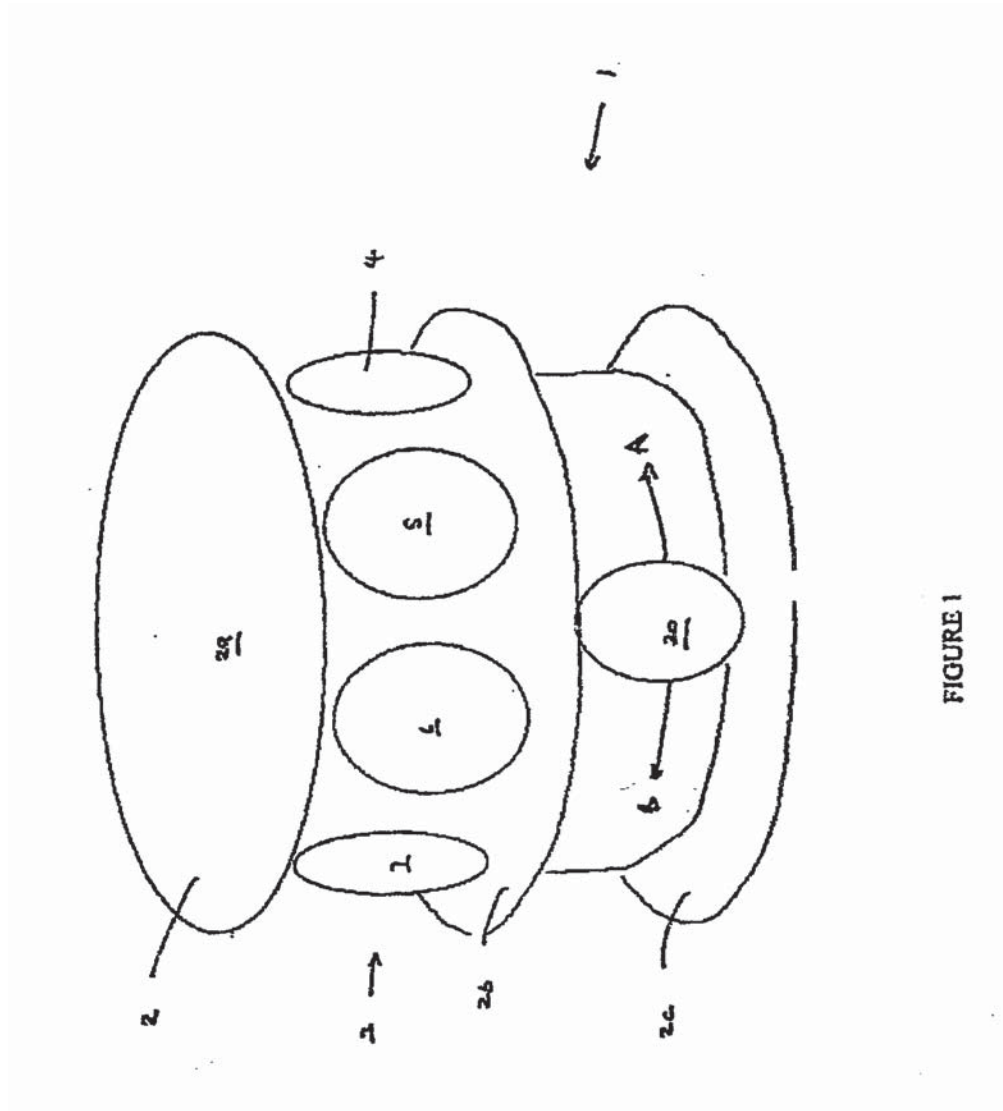


FIGURE 1

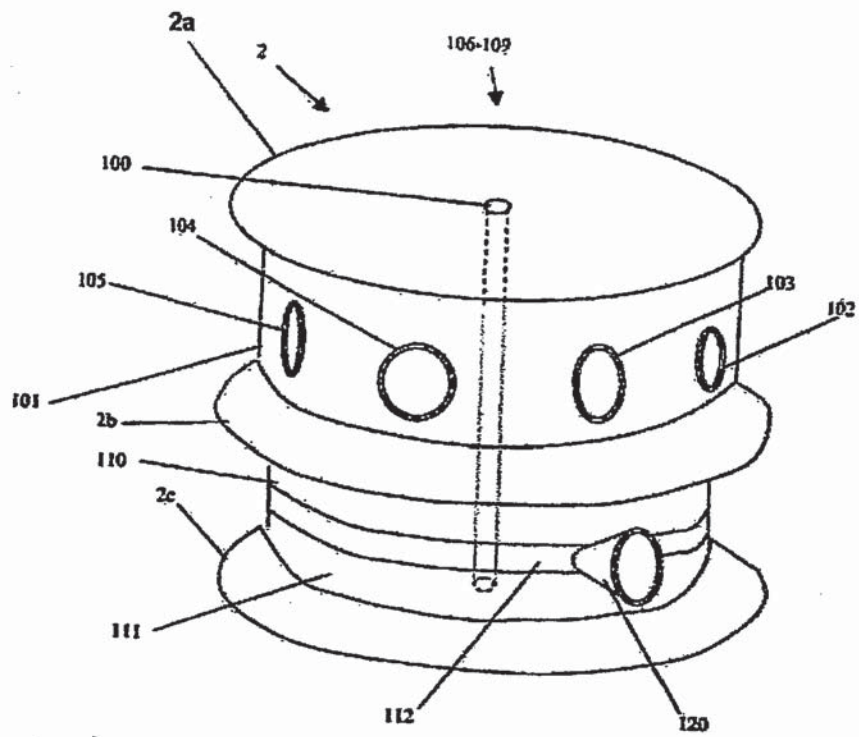


FIGURE 2

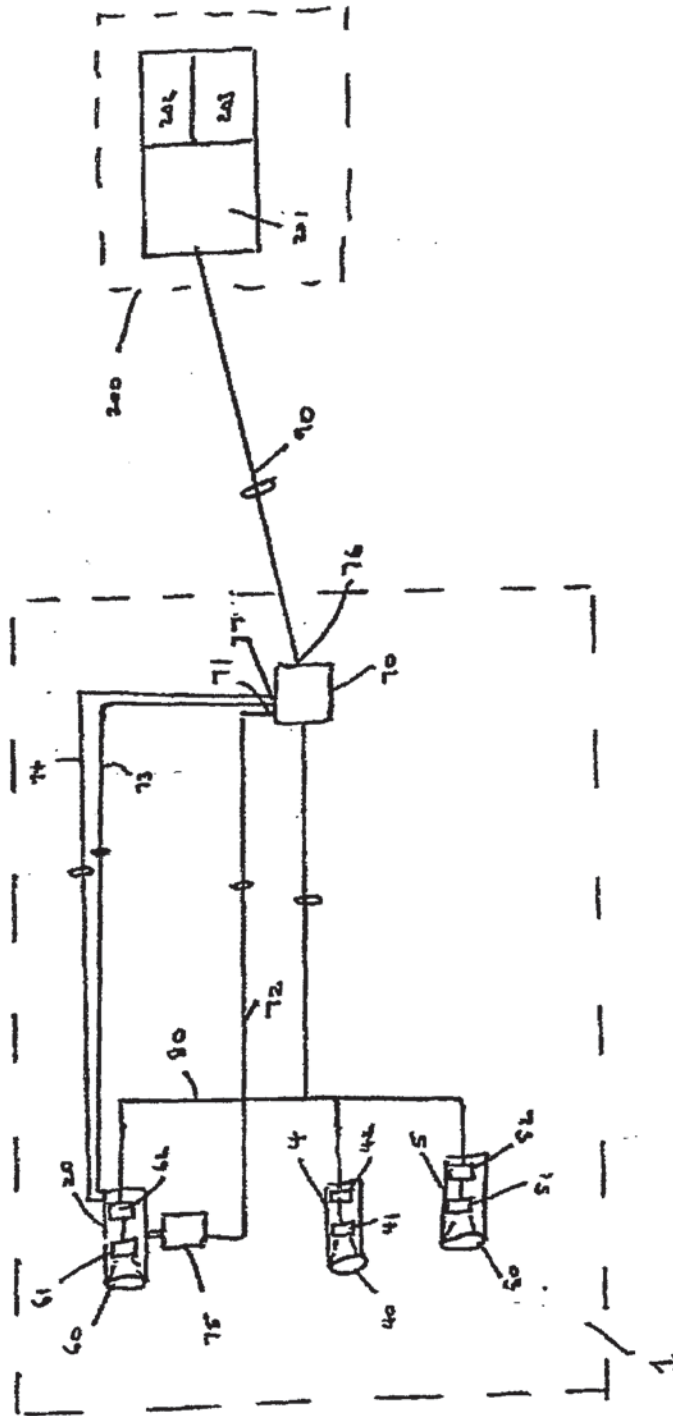


Figure 2

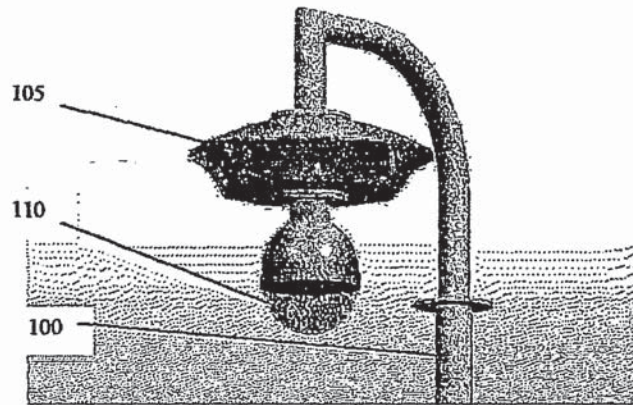


Figure 4

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 6215519 B [0004]